

KP 2400



EN: The **Glassmove®** mechanism, which provides flexibility for the glass is available in the KP 2400 series. The supporting shoes are supplied in 15 cm and 30 cm lengths. The distance between 2 adjacent shoes should not exceed 30 cm. More suitable for residential projects and private houses.

The thickness of the glass may be selected optionally between 12 -21.52 millimeters.

FR: Le mécanisme **Glassmove®**, qui offre de la flexibilité pour le verre, est disponible dans la série KP 2400. Les pieds de soutien sont fournis en longueurs de 15 cm et 30 cm. La distance entre 2 pieds adjacents ne doit pas dépasser 30 cm. La série est plus adaptée aux projets résidentiels et aux maisons privées.

L'épaisseur du verre peut être choisie en option entre 12 et 21,52 millimètres.

DE: Der **Glassmove®**-Mechanismus, der dem Glas Flexibilität bietet, ist in der KP 2400-Serie erhältlich. Die Stützschuhe werden in Längen von 15 cm und 30 cm geliefert. Der Abstand zwischen 2 benachbarten Schuhen sollte 30 cm nicht überschreiten. Eher geeignet für Wohnprojekte und Privathäuser.




Die Dicke des Glases kann wahlweise zwischen 12 und 21,52 Millimetern gewählt werden.




KP 2400 CODES

- KP2400.005.00
- KP2400.010.00

PARTS DRAWING



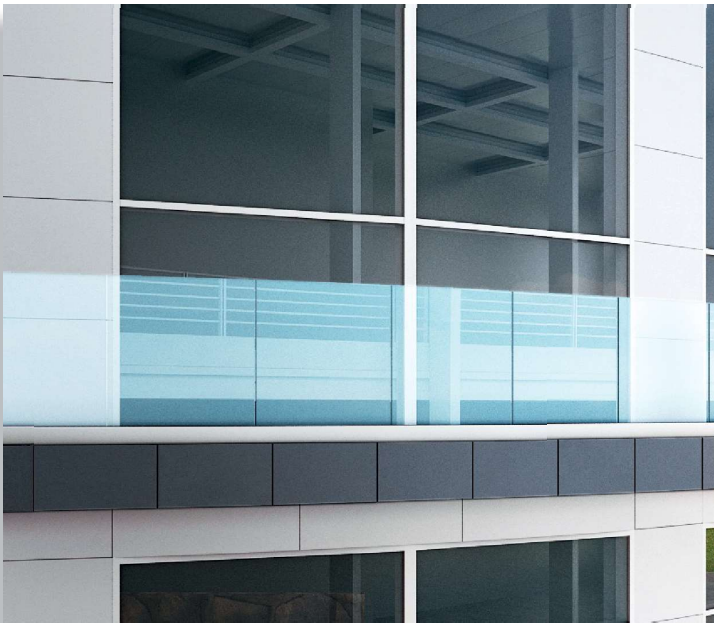

KP 2400.005.00



- Upper Mounting Glass Channel Profile (5 cm)

KP 2400.010.00




- Upper Mounting Glass Channel Profile (10 cm)

9290.600.00



- Upper Mounting Glass Profile Cover (1 mt)

9260.600.00

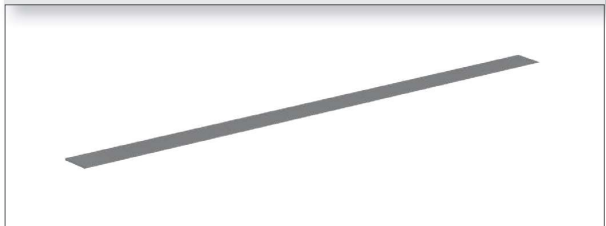

- Glass Channel Rail Profile (1 mt)

KP 2400.65.00



- Glass Channel Profile Plug

9800.010.00 M10x150



- Glass Channel Profile Fixing Anchor

9800.020.00 M10x110



- Glass Channel Profile Fixing Anchor